



Do228 NXT

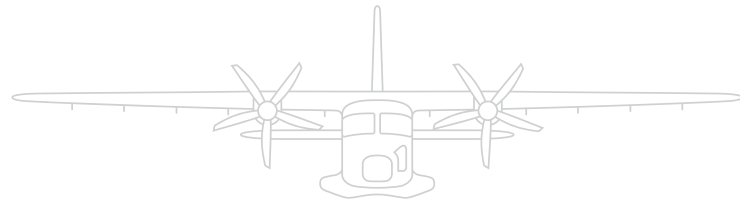

THE VERSATILE MULTI-ROLE AIRCRAFT

MISSIONS | LAYOUTS | SPECIFICATIONS | SERVICES

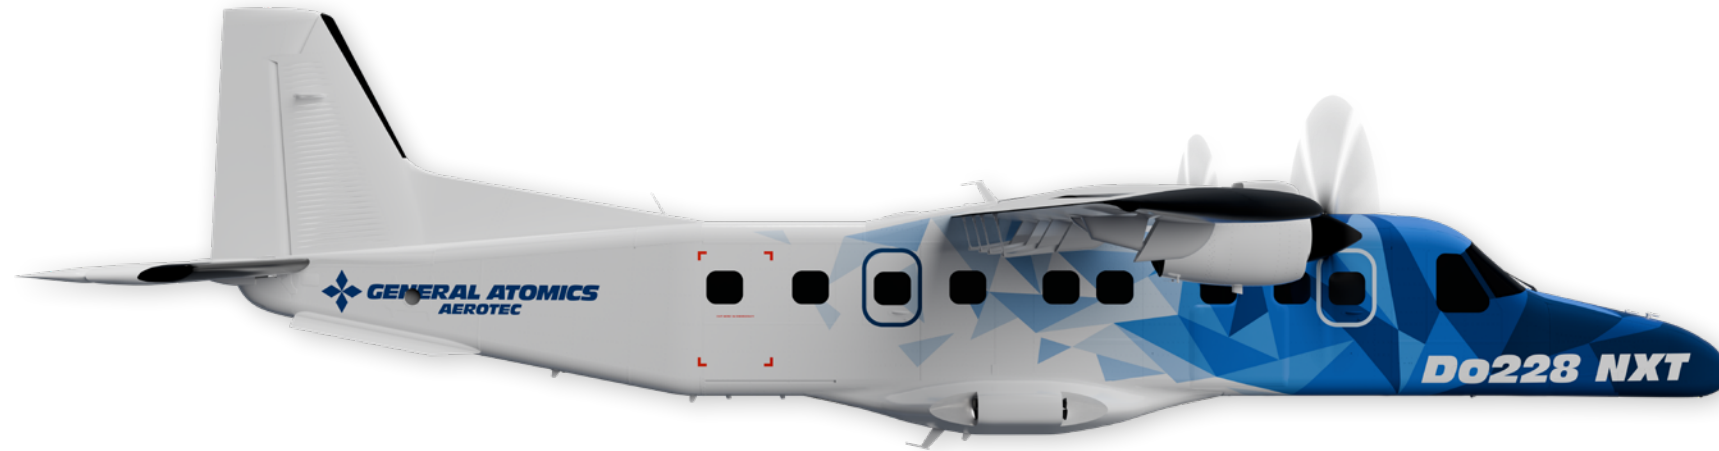

MISSIONS

4-9

[The Aircraft](#) | [Mission Areas](#) | [Missions Worldwide](#) | [Commuter](#) | [Special Mission](#)

LAYOUTS

10-23

[Passenger](#) | [Cargo](#) | [VIP](#) | [Paratrooper](#) | [Maritime](#) | [MedEvac](#)

SPECIFICATIONS

24-35

[Sensor Options](#) | [Aircraft Data](#) | [Performance](#) | [Glass Cockpit](#)

SERVICES

36-39

[Life Cycle Support](#) | [About Us](#)

THE VERSATILE MULTI-ROLE AIRCRAFT

The **Do228 NXT** is a versatile twin-turboprop aircraft known for its reliable performance and short takeoff and landing (STOL) capabilities. Designed for passenger and cargo transport, as well as special missions, it excels in challenging environments. With its high efficiency, spacious cabin, versatile equipment, flexible layouts and advanced avionics, the Do228 NXT remains a reliable choice for operators worldwide.

In the legacy of the successful and reliable service of the Do228 for over 40 years, we present the next-generation Do228 NXT featuring a renewed supply chain, a modernized cockpit, increased in-house production of components and various further improvements. With the aircraft's state-of-the-art technology, pilots are able to maintain superior situational awareness throughout the most demanding missions. No other plane in this class combines safety and efficiency to the level offered by the Do228 NXT.

Versatility, reliability and affordability - best performance in its class



STOL Certified
362 m landing distance



Cruise Speed
240 KTAS



High Endurance
Over 8 hours



Flight Range
Up to 1,635 NM



PAX Capacity
Up to 19 passengers



Payload
Typically 2,155 kg

MISSION ADVANTAGES

OPERATIONAL

- ✓ Largest payload / range ratio
- ✓ Wide range of operating speeds
- ✓ 8+ hour mission endurance
- ✓ STOL & certified for unpaved runway

MULTI-ROLE

- ✓ Optimized rectangular cabin space
- ✓ Versatile cabin layout options
- ✓ Mission equipment & sensor variety
- ✓ 4 under wing hardpoints available



ECONOMIC

- ✓ Lowest operating cost per hour
- ✓ Lowest fuel consumption in class
- ✓ Low maintenance costs & needs
- ✓ Long aircraft service life

TRANSPORT

- ✓ Unmatched payload capacity
- ✓ Up to 14,550 lb MTOW (6,600 kg)
- ✓ Easy conversion of cabin layouts
- ✓ Quick & easy cargo door swap

MISSION AREAS



Maritime Surveillance

Low level flying with proven performance in salty environments



Central Intelligence

Comprehensive intelligence for situational awareness



Paratrooper Deployment

Transport and deployment of 21 paratroopers with large cabin and roller door



Environmental Monitoring

Various sensor setups, long operating time and different flight speeds



Cargo Transport

Up to 2,155 kg cargo payload capability with easy loading and unloading



Disaster Resonse

Rapid crisis management with complete data insights



Medical Evacuation

Reliable operation for patients and medical supplies



Maritime Patrol

Protecting strategic maritime interests in real-time



Passenger Transport

Up to 19 passengers, can reach many locations thanks to STOL capability



Aerial Survey & 3D Mapping

Gathering and compelling geodata with maximum flexibility



WORLDWIDE MISSION MATCH



1

Flights in arctic climate


The Do228 is used for passenger and cargo transport to remote areas. Its capabilities allow the Do228 to operate in harsh weather conditions and arctic climate.



2

Technology test platform

Thanks to its versatile sensor options and good conversion possibilities, the Do228 can be optimally used as a test platform and technology carrier for research and development projects.



3

Enviromental control aircraft

In the North and Baltic Sea the Do228 is used as a mission aircraft for pollution control on a daily basis. It can detect oil spills from ships, due to its long endurance and low level flight capability.



4

Transport flights

With its flexibility, the Do228 can be used for passenger and cargo flights as well as MedEvac missions. With the Do228 you can reach every destination, even remote areas and small islands.



● Current worldwide Do228 operators

Border patrol aircraft

The aircraft's performance and mission equipment enables the crew to provide reliable, accurate and real-time situational awareness to maintain border security.



5

Paratrooper platform

The Do228 can be used as a platform for paratrooper training and deployment. It can carry 21 paratroopers and a jumpmaster and is easily convertible to a troop transport layout.



6

Small island passenger transport

With its STOL capability and low operating costs, the Do228 is the perfect aircraft for passenger and cargo transport to small islands, like the Izu Island chain off the Tokyo coast.



7

Maritime surveillance aircraft

The aircraft is ideally suited for coast guard and maritime patrol operations with its versatile sensor options, long mission endurance and ability to fly at different heights and speeds.



8


COMMUTER AIRCRAFT

The Do228 NXT is the perfect choice when it comes to transporting passengers and cargo. No other aircraft can transport as many passengers and cargo over a comparable distance as quickly as the Do228 NXT. Our aircraft offers a high level of safety and comfort and is capable of operating in difficult weather conditions and on remote and short runways. That's why operators around the world rely on the Do228 when it comes to demanding missions.



SPECIAL MISSION AIRCRAFT

The Do228 NXT is the platform of choice for special mission operations taking place between low level and 25,000 ft. Military and government law enforcement organizations operate the Do228 worldwide for maritime patrol (pollution control, search and rescue, border control, fishery patrol), research flights, surveillance and reconnaissance. Therefore, the Do228 NXT can be optimally adapted to its mission areas with versatile sensors and mission equipment.

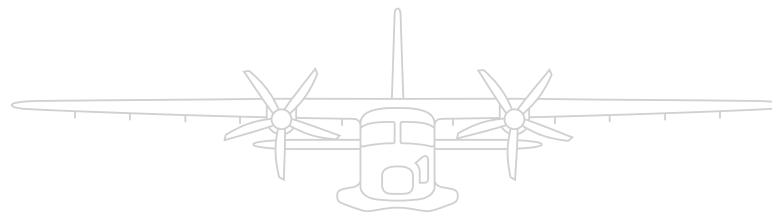

Passenger Transport



Cargo Transport



Medical Evacuation



Paratrooper Deployment



Maritime Surveillance



Disaster Response



Central Intelligence



Maritime Patrol



PASSENGER TRANSPORT


A high standard of passenger comfort is the primary consideration in the Do228 NXT design. The standard cabin consists of 19 individual passenger seats with 30-in pitch and offers airline standard passenger comfort in single seat configuration.

Its rectangular cross-section is the ideal shape for utility applications and provides passengers with ample space at shoulder height, extra passenger headroom and cargo storage space. Passengers enter through a passenger door with built-in steps on the LH side of the rear fuselage. An 18-seat layout with a toilet at the rear of the cabin is also available.


MISSION ADVANTAGES

- ✓ Transportation of up to 19 passengers
- ✓ Quick and easy conversion between cargo and passenger layout
- ✓ Rectangular cross-section provides more space for passengers
- ✓ Proven around the world in passenger transportation
- ✓ STOL capability to land on small and short runways

PAX layout - 19 passenger seats

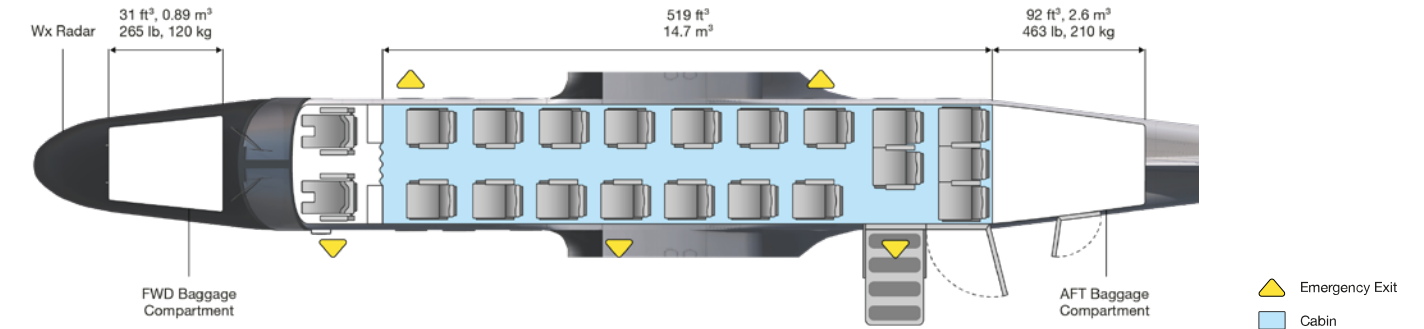

PAX layout - 18 passenger seats with toilet

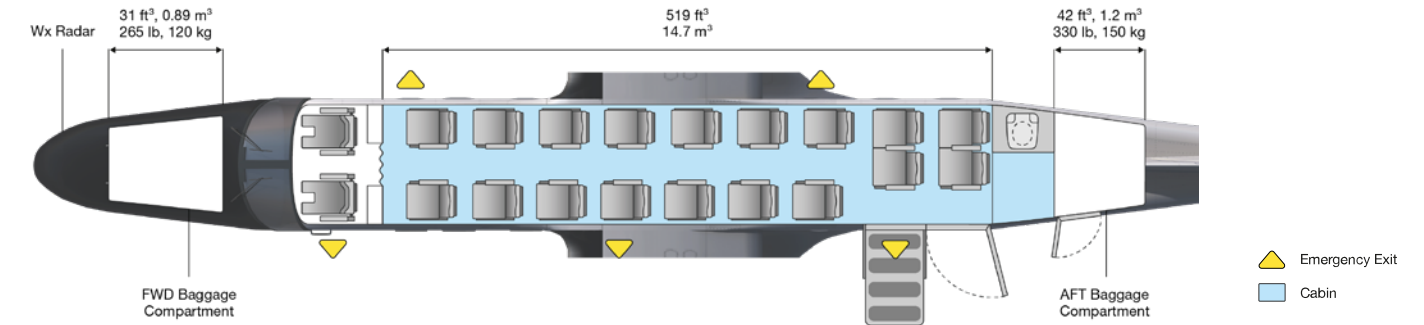


CARGO TRANSPORT

Seats can be removed quickly to convert the cabin for cargo transportation. To ease loading, a massive opening for bulky or heavy cargo can be created by opening the normal passenger door sideways, together with the adjacent door. Parcels and crates of all sorts can be distributed quickly and easily inside the cabin. While smaller and lighter cargo items can be secured with nets, bulky and heavier cargo stacked on pallets can be locked to the seat rails.

The rectangular cabin with its 23 feet of usable length significantly eases the transportation of bulky cargo or longer goods. Whatever your cargo may be, a total of two metric tons can be transported due to the large cabin space of 519 cubic feet.

Cargo layout

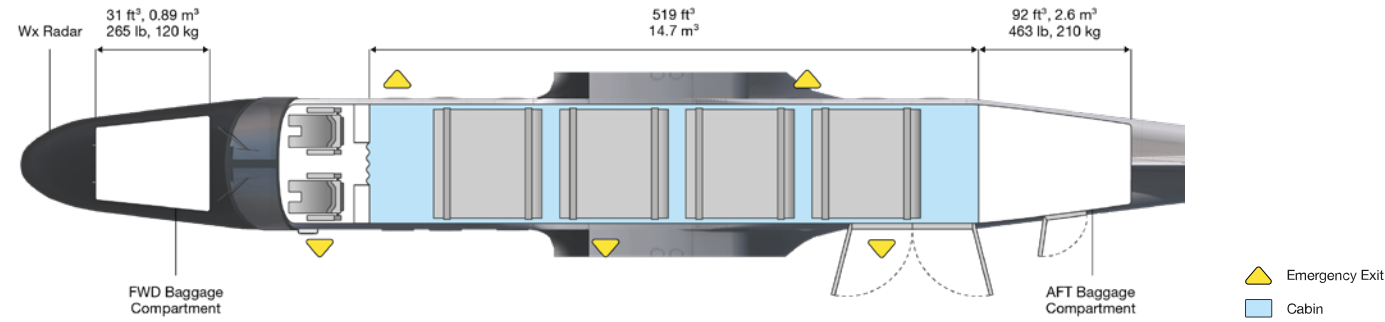

MISSION ADVANTAGES

- ✓ Up to 2,155 kg cargo payload capability
- ✓ Simple loading and unloading through large cargo door
- ✓ Transport missions to small, even unpaved airfields and remote areas
- ✓ Easy conversion from passenger to cargo layout
- ✓ Rectangular fuselage cross-section offers more space

VIP TRANSPORT

The Do228 NXT delivers exceptional performance combined with operational flexibility. Perfectly suited for VIP transport, it blends rugged reliability with a high level of travel comfort. Thanks to its STOL capabilities and the ability to operate on unpaved or short runways, it can access significantly more destinations than conventional jets—offering you true freedom of movement. Its low maintenance requirements ensure high availability and cost-effective operation all year round.


With modern air conditioning and cabin interiors tailored to your wishes, you can travel comfortably and with flair. Thanks to its special design, the cabin can be configured flexibly—with up to 19 seats plus tables, storage, screens, or even sofas.

MISSION ADVANTAGES

- ✓ STOL capability to land on small and short runways
- ✓ Increased travel comfort due to optional lavatory
- ✓ Rectangular cross-section provides more space for passengers
- ✓ Individual cabin layouts according to customer requirements possible
- ✓ Low maintenance needs and high availability



VIP layout

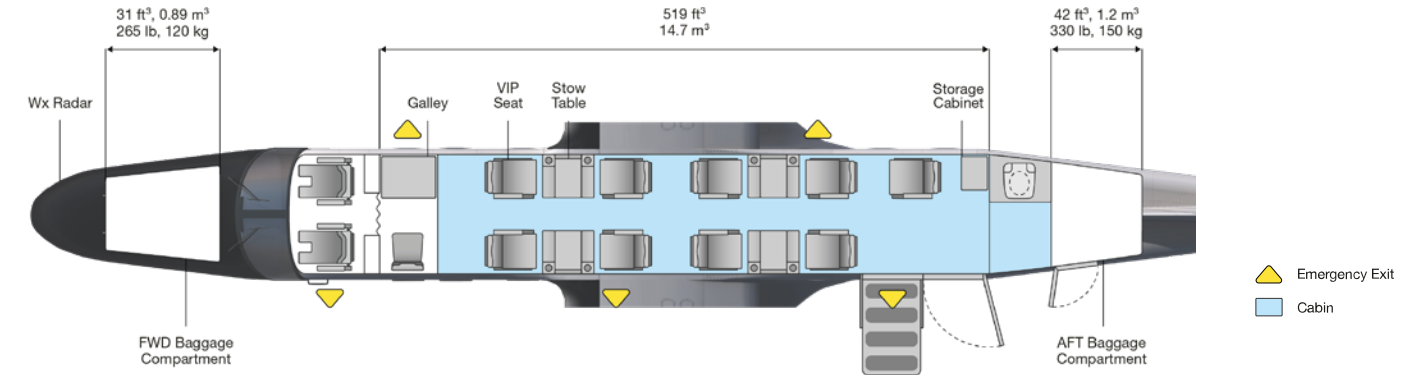


PARATROOPER DEPLOYMENT

With its STOL capability and rectangular fuselage cross-section, the Do228 is ideally suited for the transportation and deployment of paratroopers. In this configuration 21 paratroopers and 1 jumpmaster can be transported (limited to 19 paratroopers under civil registration). The layout is easily changeable to the trooper version by removing the anchor line cable and jump master equipment.

The paratrooper version is characterized for example by side facing fold-up troop seats, roller door, anchor line cable and side wall protection. An access ladder provides easy boarding for the paratroopers.

Paratrooper layout (21 paratroopers, 1 jumpmaster)

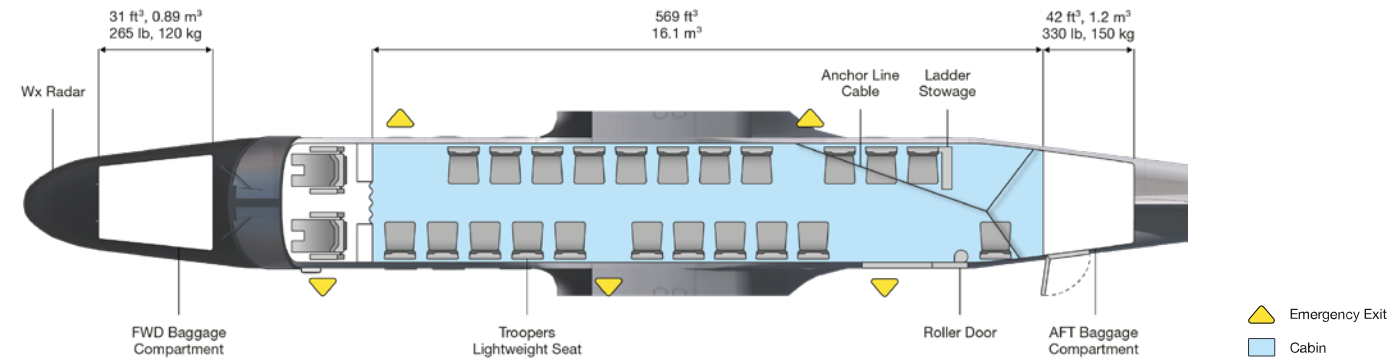

MISSION ADVANTAGES

- ✓ Transport and deployment of up to 21 paratroopers
- ✓ STOL capability allows paratrooper deployment from almost any airfield
- ✓ Quick conversion to passenger transport layout possible
- ✓ Easy airborne exiting through large roller door
- ✓ Rectangular fuselage cross-section provides more space for paratroopers

MARITIME SURVEILLANCE

The Do228 in its Maritime Patrol configuration is a highly capable multi-role aircraft designed for coastal surveillance, search and rescue (SAR), as well as law enforcement missions. Equipped with advanced radar systems, electro-optical sensors and mission management consoles, it provides real-time intelligence and situational awareness. All equipment is installed according to the customers needs and wishes.


There are various layout options with one or two operator consoles and multiple passenger seats. The modular adaptation of the cabin to your requirements offers you the best conditions for your mission.

MISSION ADVANTAGES

- ✓ Long mission endurance
- ✓ Possibility to operate at different heights, including very low heights
- ✓ Various high-tech sensor options for monitoring equipment
- ✓ Installation of operator consoles in the cabin
- ✓ Very cost efficient in operation and therefore well suited for patrol missions



Maritime Patrol layouts

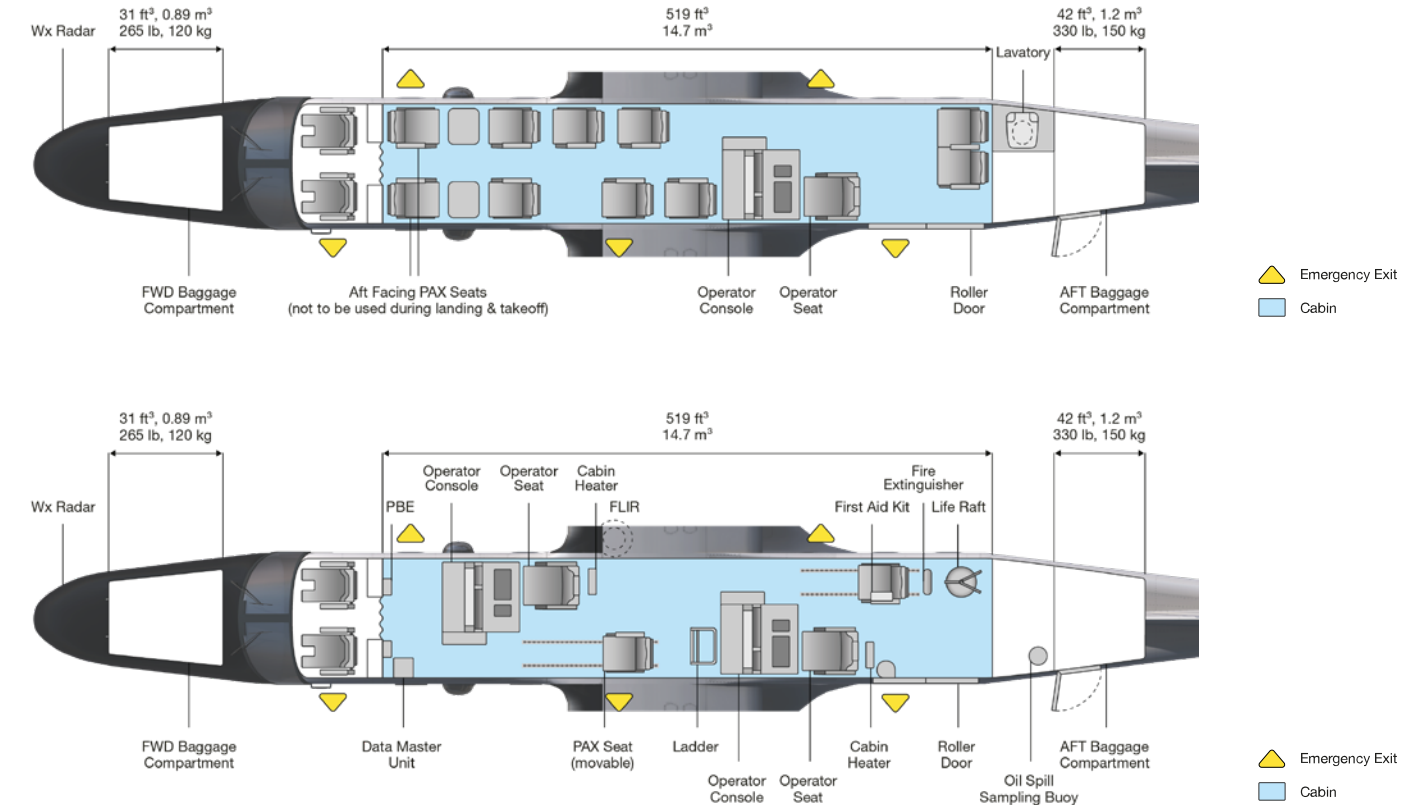


MEDICAL EVACUATION

The ambulance equipment has been designed to cover different mission aspects. The MedEvac equipment comprises of a number of compatible, partially redundant and interchangeable modules, that facilitate quick change and case focused set ups for mere transport to intensive care of patients. The given flexibility enables the operator to offer a range of highly desirable medical services.

Complying to the MedEvac hygienic requirements, the cabin ceiling and walls of the Do228 NXT are covered with a polycarbonate lining with a washable surface for sanitising. The cabin floor is covered with a special washable anti-skid coating that protects the aircraft's lower structure against contamination by fluids and prevents slipping. The cabin can be equipped with various combinations of forward and side facing seats and double stretcher as well as intensive care stations.

MedEvac layout

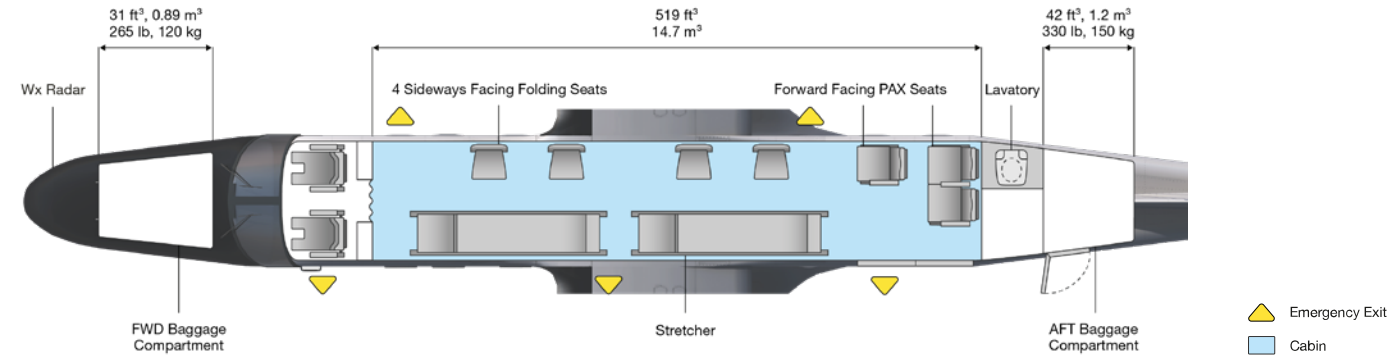

MISSION ADVANTAGES

- ✓ STOL capabilities enable operation in many regions
- ✓ Space for several stretchers and medical staff
- ✓ Meets hygienic requirements with polycarbonate covering
- ✓ Landing on unpaved runways enables MedEvac operations in remote areas
- ✓ Simple conversion from MedEvac layout to other transport layouts (cargo, passenger)

MISSION ADAPTABLE

The Do228 NXT in customized maritime patrol configuration is the most suitable and economical solution for your mission.

Proven to be the optimal platform for tailored solutions, the Do228 is deployed worldwide, meeting diverse mission requirements with advanced mission systems. Our decades of experience ensure the best selection and integration of mission systems. Numerous mission applications have been successfully implemented, showcasing our commitment to excellence and versatility. Whether it's radar systems, optical systems or communication systems - the possibilities are endless. We are dedicated to meeting customer requirements with innovative solutions that push the boundaries of technology and performance.



1 Integrated Glass Cockpit



2 Operator Console



3 Bubble Windows



4 SLAR (side-looking airborne radar)



5 360° Surveillance Radar



6 VIS Line Scanner

8 MWR



9 EO/IR Turret




10 Cargo Door

Pax Door

MISSION ADAPTABLE

The Do228 NXT sets new standards for mission flexibility through its advanced sensor integration capability and various mission equipment options. Sensors from several major manufacturers can be installed. Four hardpoints under wing allow to carry additional equipment and increase the flexibility. With its versatile sensor options, the Do228 NXT can collect high-quality data and make it available to operators.

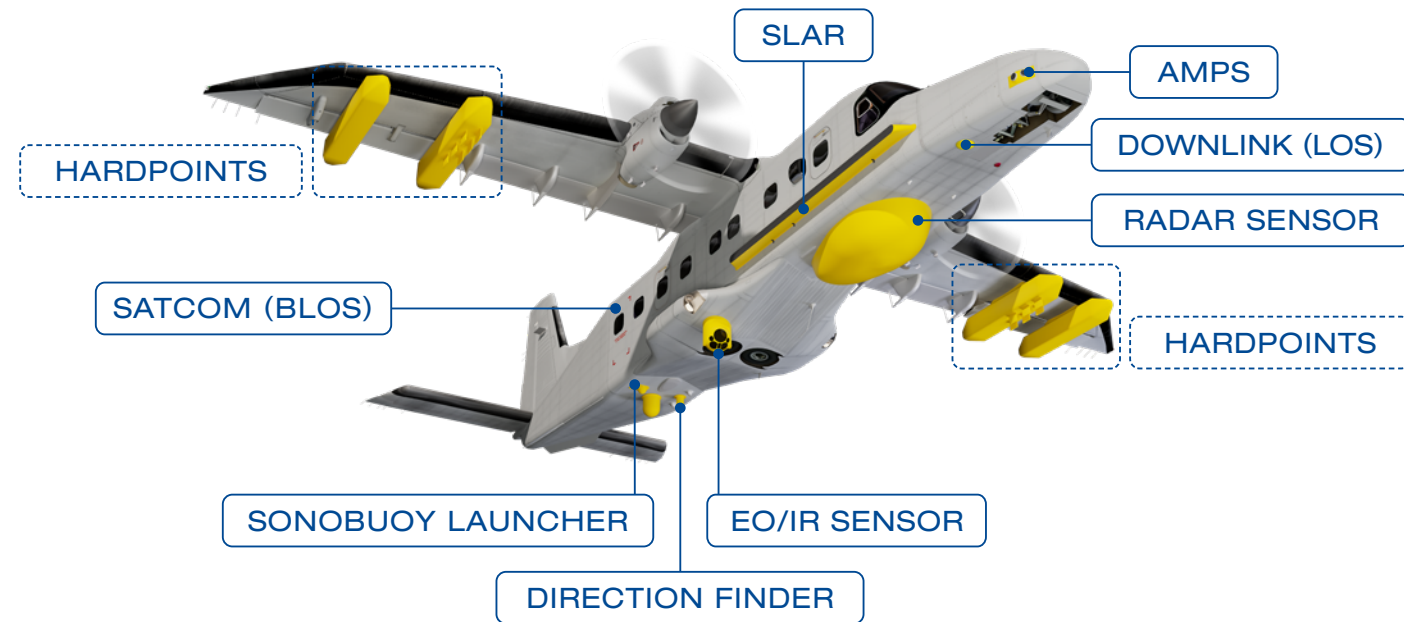

MARITIME PATROL AIRCRAFT

Protecting what matters beyond the coastline

- ✓ Anti-submarine capability
- ✓ Electronic support measures (ESM)
- ✓ Magnetic anomaly detector (MAD)
- ✓ Sonobuoy launch capability
- ✓ Long-range coastal patrol



CENTRAL INTELLIGENCE

Emphasizes persistent surveillance and situational awareness

- ✓ SIGINT/ ELINT / COMINT capability
- ✓ Full-spectrum intelligence suite
- ✓ Persistent ISR capability
- ✓ Tactical sensor integration
- ✓ BLOS / LOS downlink & network capability




DISASTER RESPONSE

Discover, monitor and protect, disaster management and wildfire detection

- ✓ Disaster response platform
- ✓ Emergency communications hub
- ✓ Multi-sensor intelligence
- ✓ Real-time awareness
- ✓ All-weather, all-terrain operations

AIRCRAFT DATA

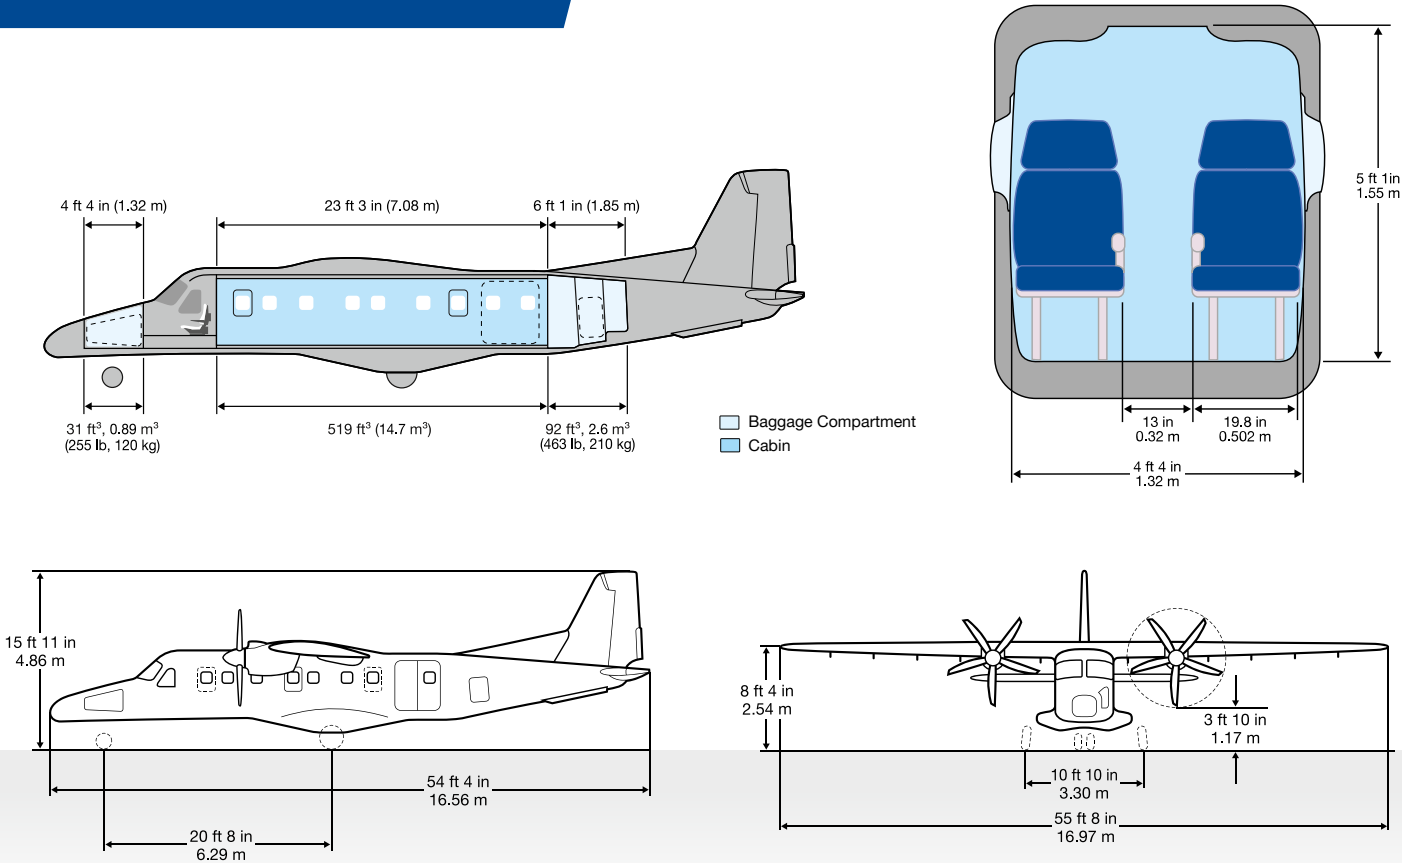

DIMENSIONS

Overall height	15 ft 11 in	4.86 m
Overall length	54 ft 4 in	16.56 m
Wingspan	55 ft 8 in	16.97m

PASSENGER COMPARTMENT

Overall length	23 ft 3 in	7.08 m
Maximum width	4 ft 4 in	1.32 m
Maximum height	5 ft 1 in	1.55 m
Compartment volume	519 ft³	14.7 m³

DOORS (HEIGHT × WIDTH)

Cockpit door	2 ft 9 in × 2 ft 2 in	0.84 m × 0.65 m
Passenger airstair door	4 ft 5 in × 2 ft 1 in	1.34 m × 0.64 m
Passenger / cargo door		
(both door panels are open)	4 ft 5 in × 4 ft 2 in	1.34 m × 1.28 m
Baggage door (front)	3 ft 11 in × 1 ft 8 in	1.20 m × 0.50 m
Baggage door (rear)	2 ft 11 in × 1 ft 9 in	0.89 m × 0.53 m
Emergency exits (3)	2 ft 2 in × 1 ft 7 in	0.67 m × 0.48 m

ENGINES

Manufacturer	Honeywell	
Model	2x TPE331-10 engine with MTV-27 propeller	
Power output	579 kW (776 SHP) each (flat) rated power	
Takeoff noise level	76.7 dB(A)	
Temperature limits		
• Engine start	-40°F to 131°F	-40°C to 55°C
• Engine operation	-65.2°F to 131°F	-54°C to 55°C

WEIGHTS

	lb	kg
Max. takeoff weight (MTOW)		
• Standard	14,110	6,400
• Optional civil	14,495	6,575
• Optional military	14,550	6,600
Max. landing weight (MLW)		
• Standard	13,448	6,100
• Optional	14,110	6,400
Max. zero fuel weight (MZFW)	13,095	5,940
Basic weight		
• Cargo layout	8,157	3,700
• Passenger layout (incl. 19 PAX seats)	8,631	3,915
• Mission layout (incl. operator console)	9,204	4,175
Max. usable fuel		
• Standard	4,156	1,885
• Optional wet wing	4,965	2,252
Max. useful load		
• Standard	5,952	2,700
• Optional civil	6,338	2,875
• Optional military	6,393	2,900

PERFORMANCE

TAKEOFF

Takeoff distance to 35 ft¹		
• ISA, SL	2,606 ft	794 m
• ISA + 10°C, 2,000 ft elevation	3,154 ft	961 m
• ISA + 20°C, 4,000 ft elevation	3,970 ft	1,210 m
Accelerate stop distance¹		
• ISA, SL	2,562 ft	781 m
• ISA + 10°C, 2,000 ft elevation	3,027 ft	923 m
• ISA + 20°C, 4,000 ft elevation	3,684 ft	1,123 m
STOL takeoff distance to 50 ft²		
• ISA, SL	1,460 ft	445 m
• ISA + 10°C, 2,000 ft elevation	1,640 ft	500 m
• ISA + 20°C, 4,000 ft elevation	2,021 ft	616 m
Max. crosswind for ground operation	45 kts	83 km/h
Max. demonstrated crosswind for takeoff & landing	30 kts	55 km/h

CLIMB

Two engines climb rate³	1,637 ft/min	8.3 m/s
Single engine climb rate⁴	410 ft/min	2.1 m/s

¹ MTOW (6,400 kg), paved dry runway, 0 kts wind, 0 % slope, flaps 1, engine failure at v_r
² MTOW STOL (5,700 kg), paved dry runway, 0 kts wind, 0 % slope, flaps 2, unfactorized data
³ MTOW (6,400 kg), ISA, SL, flaps 1, V_r
⁴ MTOW (6,400 kg), ISA, SL, flaps UP, V_{YSE}
⁵ MTOW (6,400 kg), ISA, flaps UP, V_{YSE}, 50 ft/min residual climb

FLIGHT

Max. cruise speed (ISA, 10,000 ft)	240 KTAS	
Max. operating altitude	25,000 ft	7,620 m
Single engine service ceiling⁵	17,000 ft	5,182 m
Max. endurance⁶		
• Standard	8.3 hrs	
• Wet wing option	10.4 hrs	
Max. range (Max. Fuel + Typical Payload 645 kg)⁷	1,323 NM	2,450 km
Max. range @ max. payload⁷	160 NM	296 km


LANDING

Landing distance from 50 ft⁸		
• ISA, SL	1,473 ft	449 m
• ISA + 10°C, 2,000 ft elevation	1,595 ft	486 m
• ISA + 20°C, 4,000 ft elevation	1,729 ft	527 m
STOL landing distance from 30 ft⁹		
• ISA, SL	1,189 ft	362 m
• ISA + 10°C, 2,000 ft elevation	1,227 ft	374 m
• ISA + 20°C, 4,000 ft elevation	1,319 ft	402 m

⁶ MTOW (6,400 kg), ISA, cargo layout (incl. 2 pilots, each 85 kg), FL100, 0 kts wind, max endurance speed,NBAA IFR reserves (100 NM alternate)
⁷ MTOW (6,400 kg), ISA, FL100, 0 kts wind, best range speed, cargo layout incl. 2 pilots each 85 kg, NBAA IFR reserves (100 NM alternate)
⁸ MLW (6,100 kg), paved dry runway, 0 kts wind, 0 % slope, flaps DN, unfactorized data
⁹ MLW STOL (5,700 kg), paved dry runway, 0 kts wind, 0 % slope, flaps DN, unfactorized data



PAYLOAD-RANGE-DIAGRAM

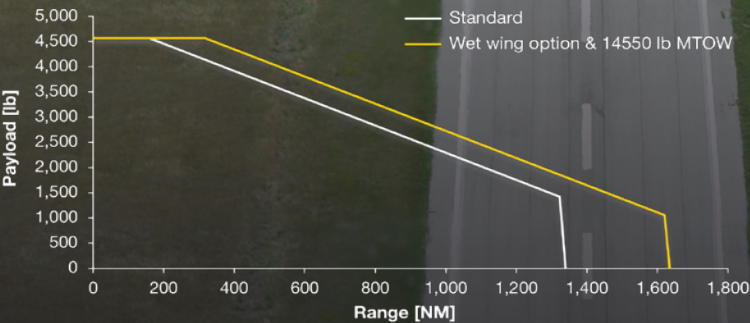

Cargo layout incl. 2 pilots each 187 lb, ISA, FL100, 0 kts wind, best range speed, NBAA IFR reserves (100 NM alternate)

GLASS COCKPIT

The cockpit is fitted with 4 large UNIVERSAL® displays featuring one Primary Flight Display (PFD) and one Multi Function Display (MFD) in front of each crew member located on the central panel. Additionally an Electronic Standby Instrument System (ESIS) is installed between the two MFD. Those crystal clear, sunlight readable HD displays provide the pilots with the specific information required during each phase of the mission.

KEY FEATURES

- ✓ Fully integrated Universal® EFI-890R avionics suite with four displays
- ✓ Native NVG PFD / MFD display available
- ✓ Digital autopilot
- ✓ Flight management system with RNP and LPV approach capabilities (dual SBAS / WAAS GPS)
- ✓ Dual AHRS and dual ADC
- ✓ Navigation display with TAWS overlay, ground proximity warning system
- ✓ TCAS II
- ✓ Emergency ESIS with navigation capability

Optional features

- ✓ V / UHF, HF, marine radio
- ✓ Satellite communication, data link
- ✓ TACAN, SAR DF
- ✓ Video stream to MFD for mission operation
- ✓ Ergonomic mission operator consoles
- ✓ Additional electrical heater for polar operation



LIFE CYCLE SUPPORT


General Atomics AeroTec Systems is the OEM and type certificate holder of the Do228. The aircraft has been manufactured at our site for more than 40 years. This means that we know the Do228 better than anyone else and can offer a wide range of services for the aircraft based on our extensive expertise.

Our Do228 service portfolio offers Do228 operators full life cycle support for the aircraft. This includes all MRO services, upgrades and modification options, customer material and technical support, engine overhauls for the Honeywell TPE331 as well as reliable AOG service.

With our certified training organization and state-of-the-art Do228 flight simulator, we offer pilot and crew training at the highest level. Our full life cycle support ensures that the aircraft can be operated safely, economically and in accordance with the customer requirements at any time.

BENEFIT FROM OUR EXPERTISE

- ✓ Full life cycle support for Do228 NXT aircraft
- ✓ In-depth knowledge of the Do228 NXT as the OEM
- ✓ Unmatched expertise from over 45 years of manufacturing and maintaining the Do228
- ✓ Certified excellence — EASA (Part 145 & Part CAMO), FAA (Repair Station), CAA UK (Part 145), and Nadcap (NDT)
- ✓ We offer high-quality workmanship
- ✓ One single location for all Do228 NXT services

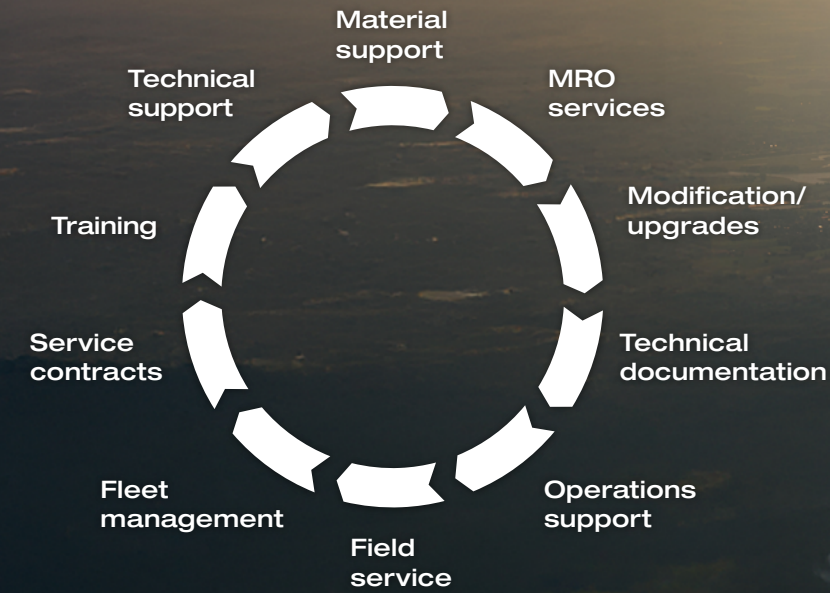


**We set new standards for the aviation of the future
and create tailor-made solutions for our customers.**

We are a modern, international aviation company and manufacturer of the legendary Do228. In Oberpfaffenhofen, in the heart of Europe, we offer maintenance, modernization and upgrades for the Do228 in a state-of-the-art service location. In our advanced assembly line we manufacture the new Do228 NXT. We also carry out maintenance services for NH90 helicopters.


Do228 aircraft have been manufactured and serviced at our site for over 40 years. Our team consists of around 350 motivated, talented and highly qualified employees.

General Atomics AeroTec Systems GmbH is a part of the General Atomics Europe group, which offers innovative, modern and customized solutions for customers in the business areas of aeronautics, infrastructure and sustainability. We are an affiliated company of General Atomics.

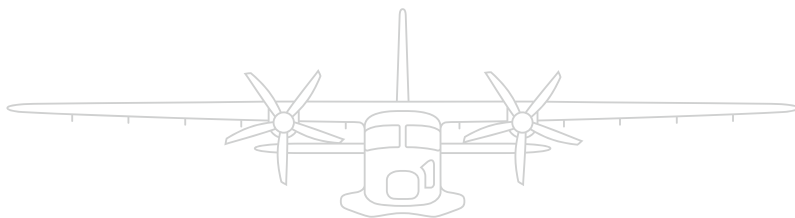

GA-ATS:
*Scan here for
more details*



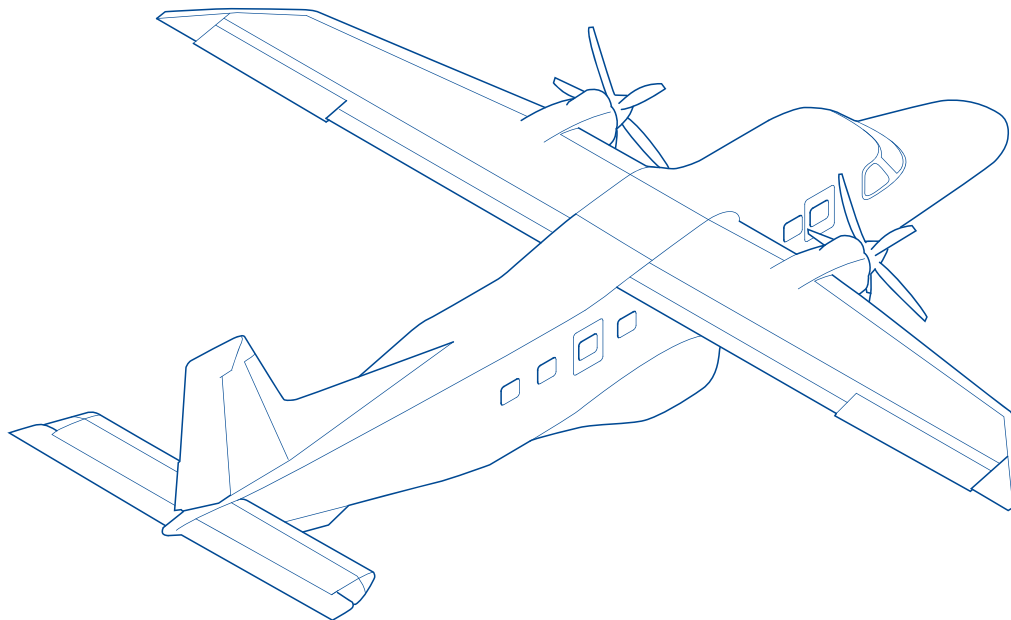

General Atomics AeroTec Systems GmbH
Galileostraße 396 | 82131 Gauting | Germany
info@ga-ats.com | ga-ats.com | do228nxt.com

© 2026 General Atomics AeroTec Systems GmbH
All rights reserved. | For informational purposes only. | Version 02.26
Technical data is subject to change and not warranted for operational use.